



超薄型汎用ワイヤレスキーボード

IC-BK12

日本語取扱説明書

www.iclever.com


パッケージ内容

- 1xワイヤレスキーボード
- 1xUSB充電ケーブル
- 1x携帯ポーチ
- 1x取扱説明書
- 1x保証カード

仕様

Bluetoothバージョン	Bluetooth 3.0
サイズ	281.7 x 135 x 14 mm
通信範囲	< 10 m
リチウム電池容量	280 mAh
充電時間	< 2 時間
連続使用時間	90 時間
待ち受け時間	90 日
表面材質	ABS
裏面材質	ステンレス鋼

インジケータについて

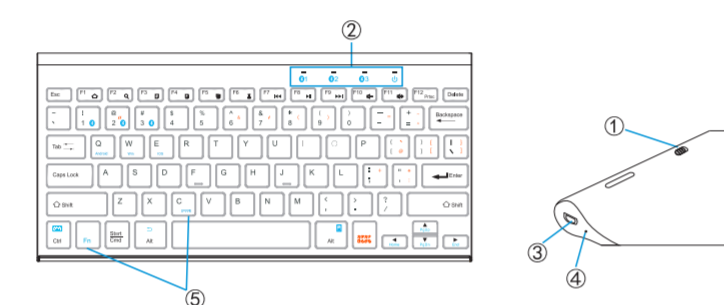

-1-

- ① キーボード電源スイッチ
- ② 電源インジケータ: スイッチをオンにして、緑色で3秒くらい点灯します。
Bluetooth接続状態インジケータ:
1/2/3の機種のペアリングされた場合、①/②/③インジケータが青色でゆっくりと点滅します。
- ③ 充電ポート
- ④ 充電インジケータ: 充電中は赤色で点灯し、充電完了になったら消灯。
- ⑤ Bluetoothペアリングボタン: 「Fn+pairing」を押すと、インジケータが青色で点滅し、ペアリングモードに入ります。接続されると、インジケータが消灯します。

★ユーザーへ: Caps Lockインジケータがないですが、機能は通常通りに使用できます。

ペアリングの手順

一台目のデバイスとペアリング

ステップ1. 電源スイッチをオンにして、電源インジケータが青色で3sくらい点灯してから消灯します。
ステップ2. 「Fn+pairing」を押すと、⑤インジケータが青色で早いスピードで点滅します。タブレットまたはスマートフォンでBluetoothデバイスを検索します。
ステップ3. リストにあるBluetooth「iclever IC-BK12 Luxury」をクリックして接続します。
ステップ4. 正常にペアリングされた後、インジケータ②が青色で点灯します。

二台目のデバイスとペアリング

ステップ1. Fn+②を押すと、②が青色でゆっくりと点滅します。
ステップ2. 「Fn+pairing」を押すと、⑤インジケータが青色で早いスピードで点滅します。タブレットまたはスマートフォンでBluetoothデバイスを検索します。
ステップ3. リストにあるBluetooth「iclever IC-BK12 Luxury」をクリックして接続します。
ステップ4. 正常にペアリングされた後、インジケータ②が青色に点灯します。

-2-

三台目のデバイスとペアリング

ステップ1. Fn+③を押すと、③が青色でゆっくりと点滅します。
ステップ2. 「Fn+pairing」を押すと、⑤インジケータが青色で早いスピードで点滅します。タブレットまたはスマートフォンでBluetoothデバイスを検索します。
ステップ3. リストにあるBluetooth「iclever IC-BK12 Luxury」をクリックして接続します。
ステップ4. 正常にペアリングされた後、インジケータ③が青色に点灯します。
備考
1. いずれのデバイスを作動させる場合、相応なFn+①、Fn+②、Fn+③キーを押してください。
2. 自動接続機能: キーボードを開いたら、最後に使用されたデバイスと自動的に接続します。
3. 接続失敗の場合は、デバイスからペアリング履歴を削除し、上記の手順に従ってもう一度試してください。

ファンクションキー機能

Windowsのタブレットでは、「Fn」を押しながらF1~F12を同時に押すとファンクションキーが起動されます。

	For Android	Fn on Windows	For Win	For iOS
Esc	N/A	N/A	Esc	N/A
ホーム	F1	ウェブブラウザ	ホーム	ホーム
Q	検索	F2	検索	検索
すべて選択	F3	すべて選択	すべて選択	すべて選択
コピー	F4	コピー	コピー	コピー
ペースト	F5	ペースト	ペースト	ペースト
カット	F6	カット	カット	カット
⏮	曲戻し	F7	曲戻し	曲戻し
⏮	再生/一時停止	F8	再生/一時停止	再生/一時停止

-3-

	For Android	Fn on Windows	For Win	For iOS
▶▶	曲送り	F9	曲送り	曲送り
⏪	ボリュームダウン	F10	ボリュームダウン	ボリュームダウン
⏩	ボリュームアップ	F11	ボリュームアップ	ボリュームアップ
Prts	N/A	F12	Screenshot	N/A
Fn	キーボードディスプレイ	N/A	N/A	キーボードディスプレイ
Fn+⏪	電源ディスプレイ		電源ディスプレイ	電源ディスプレイ
Fn+⏩	ペアリング		ペアリング	ペアリング

注意: Android、WindowsまたはiOS、各システムの間で切り替えるにはFn+Q、Fn+W、またはFn+Eキーを押してください。そうしないと、一部のファンクションキーが使用できない可能性があります。

Fn+Q - Android Fn+W - Windows Fn+E - iOS

Windowsのタブレットを使用する場合、日本語状態で以下の文字入力方法

Shift+2	~	Shift+6	&	Shift+7	ˆ
Shift+8	(Shift+9)	Shift+ =	=
=	^	Shift+=	~	[@
Shift+[ˆ]	[Shift+]	{
\]	Shift+\]	Shift+;	+
,	:	Shift+,	*	Shift+;	+/

入力言語の切り替え

Samsung Android: shift + Space
Google Android: ctrl + Space
Windows: cmd + Space / ctrl+shift
iOS 8とそれ以前のシステム: cmd + Space
iOS 9とそれ以降のシステム: ctrl + Space

-4-

重要事項—入力言語の設定

本製品は多国言語対応であるため、使用する前に入力言語の設定が必要です。
1. iOS デバイスの場合:
設定>一般>キーボード>新しいキーボードを追加>使いたい言語を選択
2. Samsung Androidデバイスの場合:
設定>コントロール>言語と文字入力>Samsungキーボード>入力言語を選択
> 使いたい言語を選択
3. Androidデバイスの場合:
設定>言語と文字入力>物理キーボード>キーボードレイアウト設定>使い
たい言語を選択
4. Windowsデバイスの場合:
コントロールパネル>時間・言語・地域>使いたい言語を選択

対応するシステム

- iOS 6.0とそれ以降のシステム
- Mac OS X v10.6、Mac OS X v10.12とそれ以降のシステム
- Windows XP / Vista / 7 / 8 / 10、PC (Bluetooth機能あり)
- Android 3.0とそれ以降のシステム (Bluetooth HID profile機能あり)
- 当キーボードはSamsung Smart TV

(UE37ES5500, UE55KU6400U, UE48JU6400), Mac mini, Nokiaスマホに対応しません。

省エネモード

30分間操作しない場合、キーボードが自動的にスリープモードに入ります。再起動するには、いずれのキーを押して、3秒くらいお待ちください。

-5-

充電について

- 付属のUSBケーブルを使って充電してください。一端をパソコンやACアダプタに接続し、もう一端をキーボードの充電ポートに接続してください。
- 充電中、充電インジケータが赤色で点灯します。フル充電まで約2時間かかります。(入力: DC 5V/500mA)

FAQ

デバイスと接続できない。
1. お使いのデバイスとキーボードのバッテリー残量が不足ではないかを確認してください。
2. お使いのデバイスのBluetooth機能がオンになっているかを確認してください。
3. お使いのデバイスとキーボードの距離を10メートル以内にしてください。

-6-



Ultra-slim Universal Wireless Keyboard

IC-BK12

User Manual

www.iclever.com


Package Contents

- 1 x Wireless Keyboard
- 1 x USB Charging Cable
- 1 x Carry Pouch
- 1 x User manual
- 1 x Warranty Card

Specifications

Bluetooth version	Bluetooth 3.0
Dimensions	281.7 x 135 x 14 mm / 11.09 x 5.31 x 0.55 in
Operating Range	< 10 m / 32.8 ft
Lithium Battery Capacity	280 mAh
Charge time	< 2 hours
Uninterrupted Work Time	90 hours
Stand-by time	90 days
Front side of keyboard	ABS
Back side of keyboard	Stainless steel

Indicator Lights Description

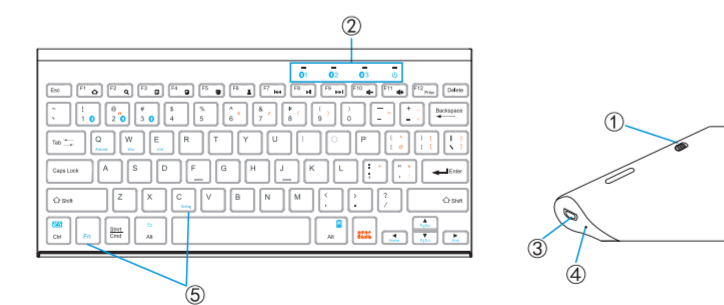

-7-

- ① Keyboard Switch Button.
- ② Power Switch: Lights up green for about 3s when being turned on.
- ③ Bluetooth Status Indicator: ① / ② / ③ indicator flashes in blue color when the first / second / third device is waiting for pairing.
- ④ Micro Charging Port: Only for charging.
- ⑤ Battery Indicator: Red light will turn on when the keyboard is charging and turns green once fully charged.
- ⑥ Bluetooth Pairing Button : Will flash blue after pressing the "Fn + pairing" Keys together. It disappears when connected.

★ For all users: No Caps Lock indicator, but will still function normally.

Pairing Steps

Pairing with the 1st device

Step 1. On the keyboard, slide the power button on. The green light will be on for 3s and then turn off.
Step 2. Press Fn + ①. ① Indicator flash blue.
Step 3. Press "Fn + pairing". ① Indicator flash blue, starting to search the available bluetooth device.
Step 4. Find the Bluetooth name "iclever IC-BK12 Luxury" and click for connection.
Step 5. The ① indicator will be blue after successfully paired.

Pairing with the 2nd device

Step 1. Press Fn + ②. ② Indicator flash blue.
Step 2. Press "Fn + pairing". ② Indicator flash blue, starting to search the available bluetooth device.
Step 3. Find the Bluetooth name "iclever IC-BK12 Luxury" and click for connection.
Step 4. The ② indicator will be blue after successfully paired.

-8-

Pairing with the 3rd device

Step 1. Press Fn + ③. ③ Indicator flash blue.
Step 2. Press "Fn + pairing". ③ indicator flash blue, starting to search the available bluetooth device.
Step 3. Find the Bluetooth name "iclever IC-BK12 Luxury" and click for connection.
Step 4. The ③ indicator will be blue after successfully paired.

NOTE:

- Three devices can be actively paired at one time, only need to press Fn+①②③ key, changing to the accorded paired device.
- Re-connection function: Turn on the keyboard, it can connect with the last used device automatically.
- If connection is failure, delete the pairing record from your device, and try the above procedures again.

Keys and Functions

For the Windows tablets, press and hold the "Fn" keys while pressing the F1-F12 keys.

	For Android	Fn on Windows	For Win	For iOS
Esc	N/A	N/A	Esc	N/A
ホーム	F1	Web browser	Home	Home
Q	Search for	F2	Search for	Search for
すべて選択	F3	Select all	Select all	Select all
コピー	F4	Copy	Copy	Copy
ペースト	F5	Paste	Paste	Paste
⏮	Cut	F6	Cut	Cut
⏮	Previous track	F7	Previous track	Previous track
▶▶	Play/pause	F8	Play/pause	Play/pause

-9-

	For Android	Fn on Windows	For Win	For iOS
▶▶	Next track	F9	Next track	Next track
⏪	Volume -	F10	Volume -	Volume -
⏩	Volume +	F11	Volume +	Volume +
Prts	N/A	F12	Screenshot	N/A
Fn	Keyboard display	N/A	Keyboard display	Keyboard display
Fn+⏪	Power Display		Power Display	Power Display
Fn+⏩	Pairing		Pairing	Pairing

NOTE: After connecting with the device, your must press Fn + relative OS key (Q for Android, W for Windows, E for iOS) to select operating system, otherwise some key's function are invalid.

For the windows tablets, how to type the below letters in the status of Japanese.

Shift+2	~	Shift+6	&	Shift+7	ˆ
Shift+8	(Shift+9)	Shift+ =	=
=	^	Shift+=	~	[@
Shift+[ˆ]	[Shift+]	{
\]	Shift+\]	Shift+;	+
,	:	Shift+,	*	Shift+;	+/

How to switch keyboard language

Samsung Android: shift + Space
Google Android: ctrl + Space
Windows: cmd + Space / ctrl+shift
iOS 8 or below: cmd + Space
iOS 9 or above: ctrl + Space

-10-

IMPORTANT

As this is a multilingual keyboard, set the language of the device to your desired language before use.

- For iOS devices only:
Settings > General > Keyboard > Add new keyboard > Select desired language
- For Samsung Android devices only:
Settings > Controls > Language and input > Samsung Keyboard > Select input languages > Select desired language
- For Android devices only:
Settings > Language & input > Physical Keyboard > Set up keyboard layouts > Select desired language
- For Windows devices only:
Control Panel > Clock, Language and Region > Select desired language

System requirements

- iOS 6.0 and above
- Mac OS X v10.6 to Mac OS X v10.12 and above
- Windows XP / Vista / 7 / 8 / 10, PC computer with a Bluetooth host
- Android 3.0 and above with Bluetooth HID profile (Smartphones and Tablets)
- This keyboard is not compatible with Samsung Smart TV (UE37ES5500, UE55KU6400U, UE48JU6400), Mac mini and Nokia phones.

Power Saving Mode

The keyboard will enter sleep mode after being idle for 30 minutes. To activate it, press any key and wait for 3 seconds.

-11-

How to Charge it

- Use the included USB cable for charging. Connect one end to a USB charger, and the other to the keyboard. (USB charger is not included)
- In charging, the power indicator will turn red. Generally, it takes approximately 2 hours for a full charge. (Output: DC 5V/500mA)

FAQ

If you are unable to connect the keyboard to your tablet, please try the following:
1. Starting with a full charge on both devices ensures that process won't be interrupted by a low battery.
2. Check your tablet's Bluetooth is on.
3. Make sure that the keyboard is within the effective operation distance of 32.8 feet (10 m).

-12-