

iclever logo and product name: 折り畳み式ブルートゥースキーボード IC-BK03 取扱書

このたびはiClever BK03折りたたみBluetoothキーボードをお買い上げいただきまして誠にありがとうございます。本製品をより効果的にご利用いただくために、ご使用前にこの取扱説明書をよくお読みください。お読み頂いた後も大切に保管してください。

**パッケージの内容**

- 1×ワイヤレスキーボード本体
- 1×USB充電ケーブル
- 1×携帯ポーチ
- 6×シリコンパッド

**インジケータの解説**



① **左インジケータ**: 緑色で点灯したら、Caps LockがONの状態です。  
② **右インジケータ**: 電源/充電/バッテリー残量不足  
③ **充電用ポート**

**製品仕様**

無線インターフェース	Bluetooth 3.0
展開寸法	251.7x89.6x6.6mm
動作可能距離	約10m
変調方式	GFSK
連続待受け日数	約60日間
充電時間	<2時間
連続使用時間	80時間
リチウム電池容量	210 mAh
リチウム電池寿命	約3年間
キー耐久回数	約300万回
内部材質	ABS
外部材質	アルミニウム合金

① **左インジケータ**: 緑色で点灯したら、Caps LockがONの状態です。  
② **右インジケータ**: 電源/充電/バッテリー残量不足  
③ **充電用ポート**

**Bluetooth接続状態インジケータ**

ペアリングモード	「Fn」+「C」を押す→青色で点滅→ペアリングモードに入る
接続完了	インジケータが消灯する

② **右インジケータ**: 電源/充電/バッテリー残量不足

電源ON	キーボードを開く→緑色で3秒くらい点灯が続き→電源ON
充電中	赤色で点灯→充電完了したら消灯
バッテリー残量不足	インジケータが緑色で点滅する、充電してください

③ **USB充電用ポート**

**製品仕様**

無線インターフェース	Bluetooth 3.0
展開寸法	251.7x89.6x6.6mm
動作可能距離	約10m
変調方式	GFSK
連続待受け日数	約60日間
充電時間	<2時間
連続使用時間	80時間
リチウム電池容量	210 mAh
リチウム電池寿命	約3年間
キー耐久回数	約300万回
内部材質	ABS
外部材質	アルミニウム合金

**ペアリング手順**

**一台目のデバイスのペアリング**

ステップ1. キーボードを左右広げて電源をONにしてください。LEDランプが緑色で3秒ほど点灯後消灯します。

ステップ2. 「Fn」+「Q」キーを押すとチャンネル1に入ります。

ステップ3. 「Fn」+「C」キーを同時に押すと、LEDランプが青色で点滅し、ペアリングモードに入ります。デバイスのBluetooth機能をオンにして、使用可能なデバイスを検索します。

ステップ4. 表示された「iClever IC-BK03 Keyboard」をクリックして接続します。

ステップ5. 接続されると、LEDランプが消灯します。

ステップ6. 「Fn」+「A/S/D」キーを押して対応するオペレーションOSを選択します。

**二台目のデバイスのペアリング**

ステップ1. 「Fn」+「W」キーを押すとチャンネル2に入ります。

ステップ2. 「Fn」+「C」キーを同時に押すと、LEDランプが青色で点滅し、ペアリングモードに入ります。デバイスのBluetooth機能をオンにして、使用可能なデバイスを検索します。

ステップ3. 「iClever IC-BK03 Keyboard」という名のBluetoothキーボードをクリックして接続します。

ステップ4. 接続されると、LEDランプが消灯します。

ステップ5. 「Fn」+「A/S/D」キーを押して対応するオペレーションOSを選択します。

**三台目のデバイスのペアリング**

ステップ1. 「Fn」+「E」キーを押すとチャンネル3に入ります。

ステップ2. 「Fn」+「C」キーを同時に押すと、LEDランプが青色で点滅し、ペアリングモードに入ります。デバイスのBluetooth機能をオンにして、使用可能なデバイスを検索します。

ステップ3. 表示された「iClever IC-BK03 Keyboard」をクリックして接続します。

ステップ4. 接続されると、LEDランプが消灯します。

ステップ5. 「Fn」+「A/S/D」キーを押して対応するオペレーションOSを選択します。

**接続された3つのデバイスを切り替えるには?**

「Fn」+「Q」/「W」/「E」を同時に押し切り替えます。

**接続されているチャンネルを再ペアリングするにはどうしたら良いですか?**

チャンネル1 (またはチャンネル2または3) をデバイス1とすでに接続して、ほかのデバイスをチャンネル1 (またはチャンネル2または3) と接続したい場合、次の手順で操作してください。

ステップ1. 「Fn」+「Q」/「W」/「E」キーを押すとチャンネル1/2/3に入り。

ステップ2. 「Fn」+「C」キーを同時に押すと、インジケータが青色で点滅し、ペアリングモードに入ります。デバイスのBluetooth機能をオンにして、使用可能なデバイスを検索します。

ステップ3. 表示された「iClever IC-BK03 Keyboard」をクリックして接続します。

ステップ4. 接続されると、LEDランプが消灯します。

**ご注意:**

- 自動接続機能: キーボードの電源をオンにする、最後に使用したデバイスと自動的に接続します。(接続デバイスのBluetooth機能をオンにしてください)
- ペアリングに失敗した場合は、デバイスからペアリング履歴を削除し、上記の手順を再度試してみてください。

**日本語のステータスに以下の文字を入力する方法**

Windows システムのみ適用

Shift+ [ ]	^	Shift+ [ ]	&	Shift+ [ ]	,
Shift+ [ ]	(	Shift+ [ ]	)	Shift+ [ ]	=
Shift+ [ ]	^	Shift+ [ ]	~	Shift+ [ ]	@
Shift+ [ ]	^	Shift+ [ ]	[	Shift+ [ ]	{
Shift+ [ ]	+	Shift+ [ ]	:	Shift+ [ ]	*
Shift+ [ ]	] ]	Shift+ [ ]	}	Shift+ [ ]	¥
Shift+ [ ]		Fn+Shift+ [ ]	_		

**Windowsで特別符号の入力方法:**

**Windows OSでは、日本語入力モードでローマ字のステータスに以下の符号入力方法:**

注意:かな入力ステータスで、[ ] を押すと「」を入力できます。「Fn」+ [ ] を同時に押すと「ろ」を入力できます。

**ショットカットキー機能一覧**

キー	iOS	Android	Windows
Fn+ [ ]	キーボードディスプレイ	N/A	N/A
Fn+ [ ]	N/A	バック	N/A
Fn+ [ ]	N/A	N/A	無変換
Fn+ [ ]	N/A	N/A	変換
Fn+ [ ]	削除	削除	削除
Alt+ [ ]	N/A	N/A	かな変換

キーアクション	Androidシステム	iOSシステム	Windows XP / Vista / 7 / 8 / 10 (Bluetooth機能非対応)	Windowsシステム (Fn+Shift)
[ ]	N/A	N/A	Esc	N/A
[ ]	ホーム	ホーム	F1	ウェブブラウザ
[ ]	プライムス ダウン	プライムス ダウン	F2	プライムス ダウン
[ ]	プライムス アップ	プライムス アップ	F3	プライムス アップ
[ ]	検索	検索	F4	検索
[ ]	検索	検索	F5	検索
[ ]	再生/一時停止	再生/一時停止	F6	再生/一時停止
[ ]	再生/一時停止	再生/一時停止	F7	再生/一時停止
[ ]	サイレント	サイレント	F8	サイレント
[ ]	ボリュームダウン	ボリュームダウン	F9	ボリュームダウン
[ ]	ボリュームアップ	ボリュームアップ	F10	ボリュームアップ
[ ]	スクリーンショット	スクリーンショット	F11	N/A
[ ]	ロックスクリーン	ロックスクリーン	F12	N/A

**ご注意:** ペアリング後は必ず「Fn」+システムキーを押して (iOSは「A」キー、Androidは「S」キー、Windowsは「D」キー)、使用されるシステムを登録してください。この操作しない、一部のショットカットキーの機能が使えませんが予めご了承ください。

**入力言語の切り替え**

一部の機種Huawei Ascend Mate7 Alt+Esc  
iOS 8或いはそれ以前のシステム:Win + Space  
iOS 9或いはそれ以後のシステム:Ctrl + Space  
Samsung Androidシステム:Shift + Space  
Google Androidシステム:Ctrl + Space  
Windowsシステム:Win + Space

**ご注意**

本製品は多言語対応であるため、使用前にご利用したい入力言語に設定してください。

- iOS デバイスの場合  
設定→一般→キーボード→キーボード>新しいキーボードを追加→使いたい言語を選択
- Android デバイスの場合  
設定→言語と文字入力>物理キーボード>キーボードレイアウトを選択→使いたい言語を選択
- Windows デバイスの場合  
コントロールパネル>時間・言語・地域>使いたい言語を選択

**対応するシステム**

機種	システム	対応状況
iPad/iPhone全機種	iOSシステム	○
パナソニック/ノートパソコン	Windows XP / Vista / 7 / 8 / 10 (Bluetooth機能非対応)	○
iMac / MacBooks	Mac OS X 10.2.8或いはそれ以後のシステム	○
スマートフォンのタブレット (Dell タブレット表示)	iMac / MacBooks	○
高級UE37ES500, UE55KU6400UのSamsung Smart TV, Mac mini & Nokia	—	×

**シリコンパッド**

デスクトップと直接触れることを防ぎ、製品を傷つけないように使用されます。使い方はキーボードの裏側に4個のシリコンパッドを貼り付けます。

**充電**

- 付属されるUSB充電ケーブルを使って充電してください。ケーブルの一端をUSBチャージャーと接続し、もう一端をキーボードに接続してください (USBチャージャーは別売です)。
- 充電中、インジケータが赤く点灯します。フル充電するまで約2時間が必要です (出力: DC 5V/500mA)

**FAQ (よくある質問)**

**機器と接続できない**

以下のような手順に従って操作してください。

- お使いのデバイスがBluetooth機能がオンになっているかをご確認ください。
- キーボードBK03とお使いのデバイスを10分程充電してください。
- お使いのBluetooth接続履歴を削除してください。
- お使いのデバイスのBluetoothをオフにした後、再度オンにしてください。
- お使いのデバイスとキーボードの距離をできる限り近づけてください (30cm)。
- デバイスを再起動し、再度接続を行ってください。
- カスタマーサービスにお問い合わせください。

**日本語入力モードで、入力した符号が表示されたものと異なる**

「Fn」+「Q」/「W」/「E」キーを押して対応するオペレーションシステムに切り替えます (AはiOS、SはAndroid、DはWindows)、英語 (US) 入力モードで、すべて黒の符号が入力できます。Windowsの場合、日本語入力モードでローマ字のステータスでは、すべての赤の符号が入力できます。詳細については、上記日本語のステータスに以下の文字を入力する方法をお読みください。

**F1-F12機能しません**

ファンクションキーを使用する前に、上記の「キーボード機能」をお読みください。

**安全使用するときのご注意**

- 本製品をそれ以外の傷をつられる鋭い物から離れてください。
- 本製品の上に重いものを置かないでください。
- 本製品を手入れする際、タオルなどで軽く表面を拭いてください。
- キーボードにコーヒー、お茶または他の液体をこぼさないでください。

**カスタマーサービス**


Eメール: support@iclever.co.jp

iclever logo and product name: Tri-folding Universal Magnetic Control Wireless Keyboard IC-BK03 User Manual

**Package Contents**

- 1 x Wireless Keyboard
- 1 x USB Charging Cable
- 1 x Carry Pouch
- 6 x Silicone pad
- 1 x User manual
- 1 x Warranty Card

**Indicator Lights Description**

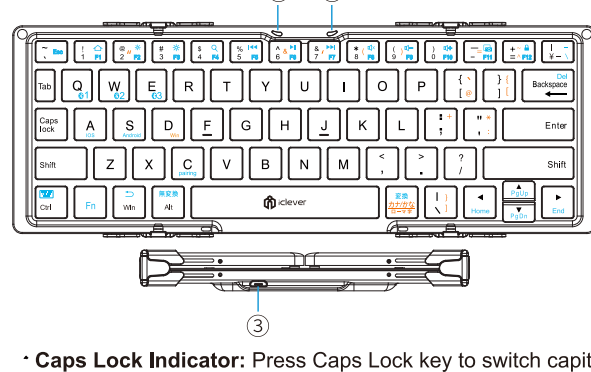

① **Caps Lock Indicator**: Press Caps Lock key to switch capital and small letters. The Green light is on.  
(For Android users, the Caps Lock indicator may not appear, but the Caps Lock function is still activated as per normal.)  
② **Bluetooth Status Indicator**: Press "Fn" + pairing" keys, it will flash blue. Pair successfully will be off.  
③ **Power Indicator**: Unfold the keyboard, power indicator will turn green for 3s and then turns off.  
④ **Charging Indicator**: Red light will be stably on when charging it, and it automatically turns off after being fully charged.  
⑤ **Low Battery Indicator**: Green light will flash when it is time to recharge.

**Specifications**

Bluetooth Specification	Bluetooth 3.0
Dimensions	251.7x89.6x6.6mm
Operating Range	Up to 10 meters
Modulation System	GFSK
Stand-by Time	60 days
Charge Time	< 2 hours
Uninterrupted Work Time	80 hours
Lithium Battery Capacity	210 mAh
Lithium Battery Life	3 years
Key Life	3 million clicks
Front Side Of Keyboard	ABS
Back Of Keyboard	Aluminium alloy

**Pairing Instruction**

**A. How to pair with Bluetooth devices?**

**Pairing with the 1st device**

Step 1. Unfold the keyboard, power indicator will turn green for 3s and then turns off.

Step 2. Press "Fn" + "Q" keys simultaneously to enter channel 1.

Step 3. Press "Fn" + "C" keys simultaneously to enter pairing mode; status indicator will flash blue, starting to search the available Bluetooth device.

Step 4. On your device, find the Bluetooth name "iClever IC-BK03 Keyboard" and click to connect it.

Step 5. The status indicator will be off after successfully paired.

Step 6. Press "Fn" + A/S/D key to choose related system.

**Pairing with the 2nd device**

Step 1. Press "Fn" + "W" keys simultaneously to enter channel 2.

Step 2. Press "Fn" + "C" keys simultaneously to enter pairing mode; status indicator will flash blue, starting to search the available Bluetooth device.

Step 3. On your device, find the Bluetooth name "iClever IC-BK03 Keyboard" and click to connect it.

Step 4. The status indicator will be off after successfully paired.

Step 5. Press "Fn" + A/S/D key to choose related system.

**Pairing with the 3rd device**

Step 1. Press "Fn" + "E" keys simultaneously to enter channel 3.

Step 2. Press "Fn" + "C" keys simultaneously to enter pairing mode; status indicator will flash blue, starting to search the available Bluetooth device.

Step 3. On your device, find the Bluetooth name "iClever IC-BK03 Keyboard" and click to connect it.

Step 4. The status indicator will be off after successfully paired.

Step 5. Press "Fn" + A/S/D key to choose related system.

**B. How to switch among 3 connected devices?**

Press "Fn" + Q/W/E key to switch.

**C. How to re-pair a channel that has already been connected?**

If you have already been connected channel 1/2/3 by device 1, and want to use other devices to re-pair channel 1/2/3, please do as following:

Step 1. Press "Fn" + Q/W/E" keys simultaneously to enter channel 1/2/3.

Step 2. Press "Fn" + "C" keys simultaneously to enter pairing mode; status indicator will flash blue, starting to search the available Bluetooth device.

Step 3. On your device, find the Bluetooth name "iClever IC-BK03 Keyboard" and click to connect it.

Step 4. The status indicator will be off after successfully paired.

Step 5. Press "Fn" + A/S/D key to choose related system.

**Notes.**

- Auto re-connect function: when you turn on the keyboard, it will connect with the last-used device automatically.
- If connection fails, delete all the pairing records from your device, and follow the above instructions again.

**The way to type Japanese letters**

For windows 10, under romaji status, to type it by below:

Shift+ [ ]	^	Shift+ [ ]	&	Shift+ [ ]	,
Shift+ [ ]	(	Shift+ [ ]	)	Shift+ [ ]	=
Shift+ [ ]	^	Shift+ [ ]	~	Shift+ [ ]	@
Shift+ [ ]	^	Shift+ [ ]	[	Shift+ [ ]	{
Shift+ [ ]	+	Shift+ [ ]	:	Shift+ [ ]	*
Shift+ [ ]	] ]	Shift+ [ ]	}	Shift+ [ ]	¥
Shift+ [ ]		Fn+Shift+ [ ]	_		

**Special letters under windows system:**

For windows 10 system, under Japanese input method, Romaji status, you can type these letter by below:

Under Kana status, you can press key of [ ] to get letter of ~, and press fn+ [ ] to get ろ.

**Keys and Function**

To use the shortcut keys, hold the "Fn" key while pressing the desired shortcut key on the Android or iOS tablets.

For the Windows tablets, press and hold the "Fn" + "Shift" keys while pressing the desired function keys.

Key icon	Fn on Android	Fn on iOS	Fn on Windows	Fn + Shift on Windows
[ ]	N/A	N/A	Esc	N/A
[ ]	Home	Home	F1	Web browser
[ ]	Brightness down	Brightness down	F2	Brightness down
[ ]	Brightness up	Brightness up	F3	Brightness up
[ ]	Search for	Search for	F4	Search for
[ ]	Previous track	Previous track	F5	Previous track
[ ]	Play/pause	Play/pause	F6	Play/pause
[ ]	Next track	Next track	F7	Next track
[ ]	Mute	Mute	F8	Mute
[ ]	Volume down	Volume down	F9	Volume down
[ ]	Volume up	Volume up	F10	Volume up
[ ]	Screen shot	Screen shot	F11	N/A
[ ]	Lock screen	Lock screen	F12	N/A

Special Key	iOS	Android	Windows
Fn+ [ ]	Keyboard Display	N/A	N/A
Fn+ [ ]	N/A	Back	N/A
Fn+ [ ]	N/A	N/A	無変換
Fn+ [ ]	N/A	N/A	変換
Fn+ [ ]	Delete	Delete	Delete
Alt+ [ ]	N/A	N/A	かな変換

**NOTE:**

After connecting with the device, you must press Fn + relative OS key (A for iOS, S for Android, D for Windows) to select operating system, otherwise some key's function are invalid.

**Switching the keyboard's language**

iOS 8 or below: Win + Space  
iOS 9 or above: Ctrl + Space  
Samsung Android: Shift + Space  
Google Android: Ctrl + Space  
Windows: Win + Space

**Important**

As this is a multilingual keyboard, set the language of the device to your desired language before use.

- For iOS devices only: Settings > General > Keyboard > Keyboards > Add new keyboard > Select desired language
- For Samsung Android devices only: Settings > Controls > Language and input > Samsung Keyboard > Select input languages > Select desired language
- For Android devices only: Settings > Language & input > Physical Keyboard > Set up keyboard layouts > Select desired language
- For Windows devices only: Control Panel > Clock, Language and Region > Select desired language

**System requirements**

- iPad and iPhones - All versions
- Bluetooth-enabled PCs or Laptops with Windows XP / Vista / 7 / 8 / 10
- iMac / Macbooks with Mac OS X 10.2.8 or above
- Smartphones or tablets (not including Dell tablets) with Android 3.0 and above (with Bluetooth HID profile)

This keyboard is not compatible with Samsung Smart TV (UE37ES500, UE55KU6400U, UE48JU6400), Mac mini and Nokia phones.

**Power Saving Mode**

The keyboard will enter sleep mode after being idle for 30 minutes. To activate it, press any key and wait for 3 seconds.

**Silicone pad**

It is used for avoiding the touch between keyboard and desk to damage the keyboard. To use it by adding 4 silicone pads at the back side of keyboard.

**How to Charge it**

- Use the included USB cable for charging. Connect one end to a USB charger, and the other to the keyboard. (USB charger is not included)
- In charging, the power indicator will turn red. Generally, it takes approximately 2 hours for a full charge. (Output: DC 5V/500mA)

**FAQ**

**I can't pair the keyboard with my device**

If you are unable to connect the keyboard to your devices, please try as following:

- Ensure the device you are trying to pair with is Bluetooth wireless-capable.
- Charge keyboard for 10 minutes.
- Delete all the Bluetooth connection records.
- On your devices, turn off the Bluetooth function and turn it on again.
- Minimize the distance between the keyboard and your device as close as possible (30cm).
- Restart the device and try it again.
- Contact us.

**The character of input is different to output:**

- Please ensure you already press Fn + A/S/D switching to corresponding system(A for iOS, S for Android, D for Windows).
- Under English(US) input method, all the black letters can be typed.
- Under windows 10 system of Japanese input method, romaji status, all the red color letter can be typed. For more detail, please read above chart of "The way to type Japanese letters".

**Functions on F1-F12 are not working.**

Please read above chart of "Keys and Functions".

**Safety Instructions**

- Keep the keyboard away from sharp objects that could damage it.
- Do not put heavy objects on the keyboard.
- To clean the keyboard, gently wipe it by using a moist cotton cloth.
- Please do not spill coffee, tea or other liquids on the keyboard.

**Contact**

For any question, please contact us by support@iclever.co.jp